POTENTIAL ERREK CUSTOMERS

































ERREK KIT CONFIGURATION

PART NUMBER HM053-082-15 HM020-901 HM020-931-11 HM022-465-1 HM022-465-21 HM022-465-41 HM022-465-51 HM022-465-61 HM022-489-11 HM022-490-11 HM022-048-11 64201BDF5HX HM022-405-31 HM020-658-11 6432061 HM022-409-11

CRATE NO.2

PART NUMBER HM053-082-15 HM020-904 HM020-925 HM020-930-21 HM022-117-81 HM022-452-81 HM022-488-1 51415K92 2005T335

HM022-117-91 512959 HM022-409-31

Extens Cable Contai

335 L

50' Collapsible Hose Quantity Meter Hose Assembly Ground Cable Assembly Coalescent Filter and Frame Assembly Coalescent Filter Cartridge Aluminum Cam and Groove Hose Coupling 4" Female to 3" Male Cam Lock Adapter








































LBS	
CRIPTION	(
ecal Blank (2.00 x 3.00)	1
d Unisex Wye	1 2
wing Nozzle Assembly	
ter Jumper Cable C-130	1
ter Jumper Cable Ground Power Adapter	1
ter Jumper Cable CH-47	1
ter Jumper Cable CH-53	1
ter Jumper Cable KC-135	1
ter Jumper Cable C-17	1
ter Cable - Power Extension Cable to pump	1
nsion Cable – 162 ft. Power Cable A/C to Pump	2
e Assy Remote - "Dead Man Switch"	1
lated Single Point D-1 Nozzle, 45 Degree	1
Assembly, with dead man switch control box	1
nd Power Adapter – Use with AGPU	/1
d Unisex to 2" Male Cam Lock - Hose adapter	1
ainer Assembly	\ / 1
LBS	
CRIPTION	
ecal Blank (2.00 x 3.00)	1
lated Single Point Nozzle	1











For sustainment, multimedia, events and more, visit us at www.robertsonfuelsystems.com

FUEL SYSTEMS A **HEICO** COMPANY

FUEL SOLUTIONS BUILT TO LAST.

We're proud to serve the military and to save lives. Robertson's Axiliary Fuel Systems

ROBERTSON FUEL SYSTEMS 800 W. Carver Rd., Suite 101 Tempe, AZ 85284

> Telephone: (480) 337-7050 Fax: (480) 968-3019

sales@robbietanks.com



EMERGENCY RESPONSE REFUELING EQUIPMENT KITS (ERREK)





KC-135, C-130 & C-17 ERREK KITS

EMERGENCY RESPONSE REFUELING EQUIPMENT KITS (ERREK)



Single Crate Dimensions 38 x 34 x 37 in.




KC-135/C-130/C-17 Total Weight **620 lbs.**

- Portable refueling and defueling capabilities
- ATTLA Approved as "general cargo, including palletized"
- Efficient, powerful self-priming 120 GPM capable pump
- Utilizes 115/200 VAC, 400 Hz, 3-phase aircraft electrical power, standard 48' power cable, optional 50' power cable
- Remote dead man switch
- Up to 600 ft. of collapsible fuel hose
- In Line Filter with both particulate and coalescence capability
- Integrated pump control box
- Ground power adapter for auxiliary ground power units
- Rugged aluminum pump module frame
- Pump module weighs approximately 49 lbs
- Compatible with all Robertson FARE system components
- Multiple electrical adapter cables included
- 600ft electrical power extension cable






SINGLE POINT OFF-LOADING WITH ERREK BOOSTER KC-135, C-17, C-130

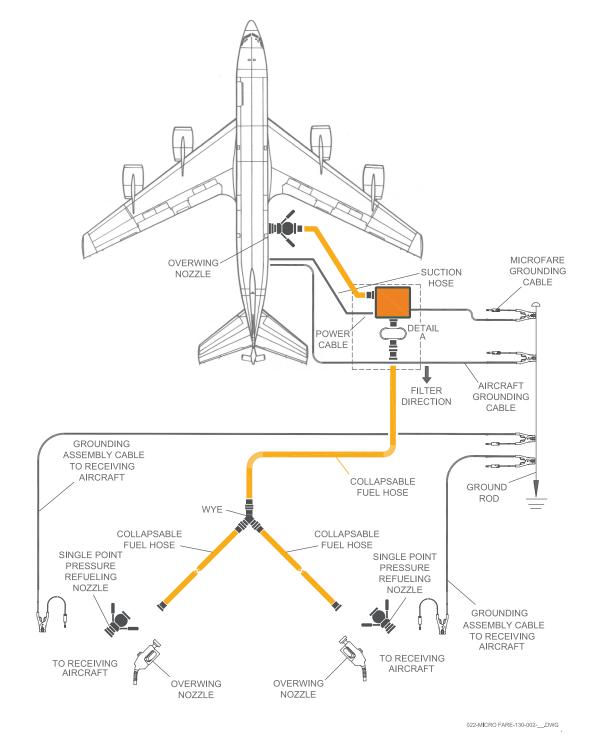


The appearance of U.S. Department of Defense (DoD) visual information does not imply or constitute DoD endorsement. Courtesy photo provided by the Department of Defense.


AERIAL REFUELING POD OFFLOAD C-130

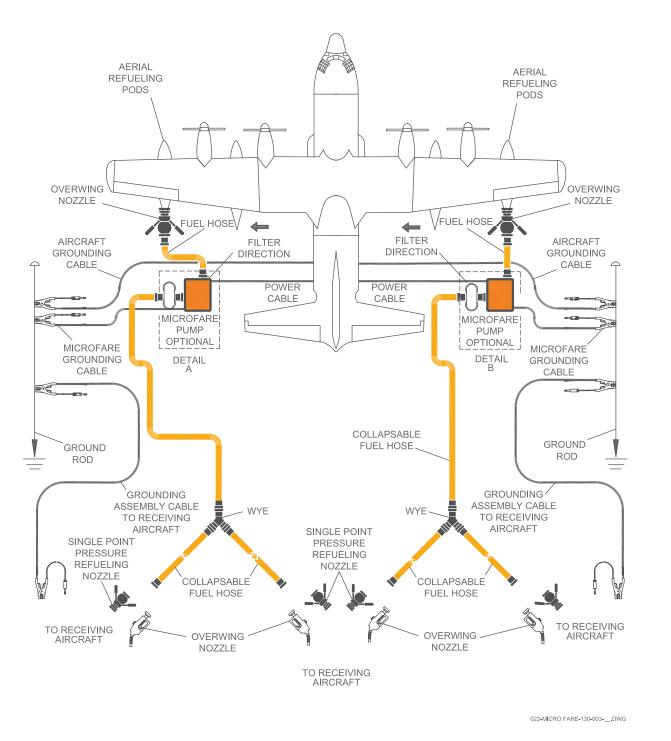

SINGLE POINT BLIVET OFFLOAD KC-135, C-17, C-130

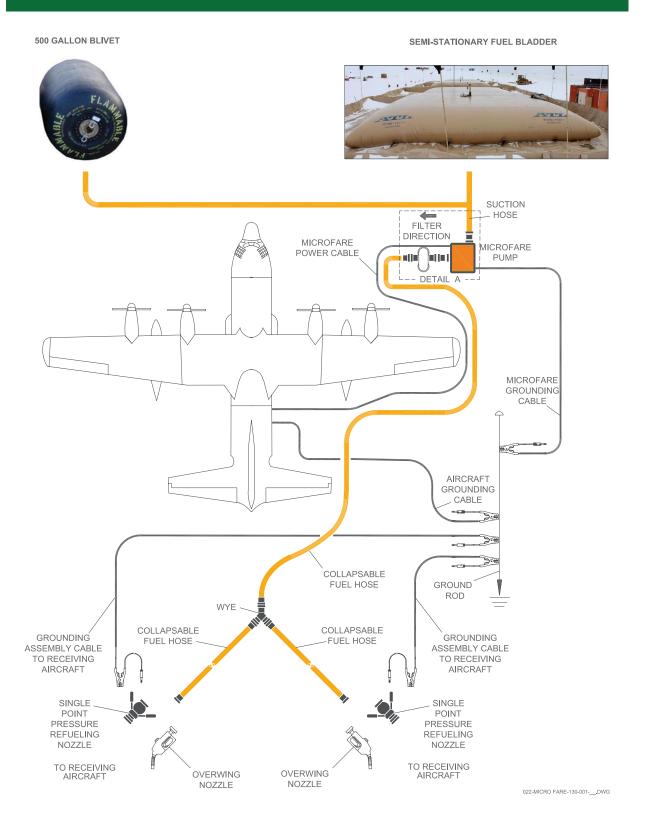

SINGLE POINT BLIVET REFUEL KC-135, C-17, C-130

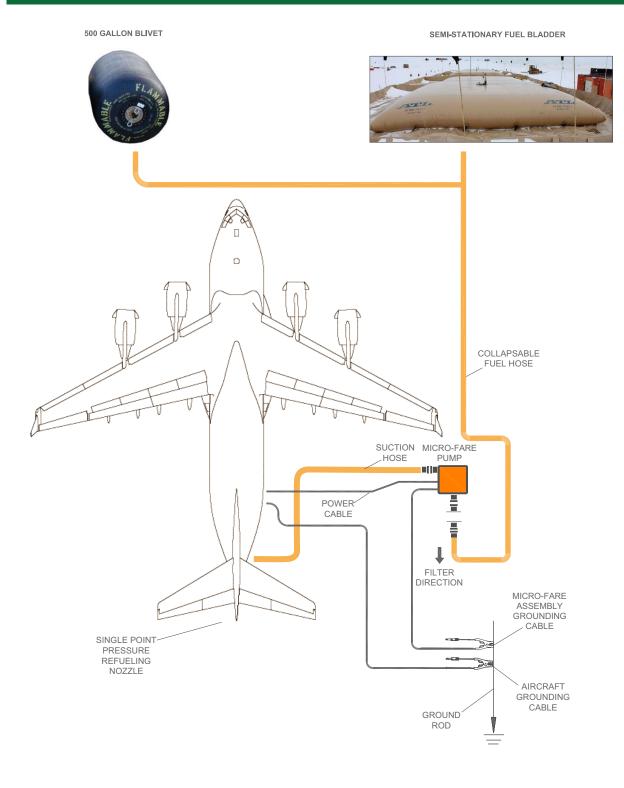

The appearance of U.S. Department of Defense (DoD) visual information does not imply or constitute DoD endorsement. Courtesy photo provided by the Department of Defense.

022-MICRO FARE-130-005-_A.DWG